

An Updated Classification Scheme for Airborne Wind Energy Designs

by Tallak Tveide, Software Developer at Kitemill AS, July 2022

Summary

We introduce a classification scheme for an emerging field of airborne wind energy where established convention is causing a lot of confusion. The wording is chosen carefully to avoid confusion and taken from resembling behavior seen bird flight. The main category is that of either «hovering» or «bounding» mode. Furthermore energy transfer is split into four distinct methods; pulling, energy conversion, rotary shaft or reeling.

Introduction

The development of airborne wind energy [AWE] systems go a long way back, and the paper «Crosswind Kite Power» by Miles Loyd [1] stated that there were two ways to harvest energy from kites, being lift and drag mode. The terms lift and drag were already quite heavily used both in aerodynamics and in traditional windmill classification, with unrelated meaning. The heavy overloading of the terms would cause confusion in the community. Later tries to make new taxonomies for AWE, such as [5], though maybe not giving categorization enough in-depth treatment. This paper aims to replace the wording to be used by the AWE community and improve the taxonomy.

In this paper, we will present two ways to classify airborne wind energy designs that should cover known designs so far. The classification will split all known AWE designs into clearly separated categories.

What do all AWE designs have in common? They utilize the difference in flow speed at altitude versus that at the ground level. Without any such difference, there is no energy to be extracted.

An edge case would be considering something like dynamic soaring [4] to be AWE. Dynamic soaring would use a difference in wind speed at two altitudes. While dynamic soaring is extracting power from altitude, we do not consider it to be AWE. So far it seems unrelated to producing electricity or fueling transport.


In traditional windmill designs, one generally refers to the blades of a turbine. For AWE, one generally speaks of kites. There are corner cases though where we are definitely dealing with airborne blades that are not themselves kites. One may refer to such as a tethered assembly of blades operating as a kite. To make things simpler, we will refer to any lifting surface, be it a rigid airfoil, an inflatable soft kite, gyrocopter or other design that could emerge in the future, as a turbine with blades. This also helps our AWE terminology stay aligned with traditional wind power.

Hovering or Bounding Mode?


One way of categorizing airborne wind energy systems that seems to carry a lot of importance is whether they are operating in «hovering» or «bounding» mode.

To understand the difference between hovering and bounding, look to the meaning of the words, related to bird flight. Hovering simply means flying without moving. Bounding flight is described in [2] as:

«These flights consist of bursts of active flapping flight alternating with passive phases, formed by glides in undulating flight and by “bounds” with folded wings in bounding flight. Mechanical energy does not flow steadily from the bird to its environment, but is stored temporarily in the bird's body in the form of kinetic or potential energy.»



hovering

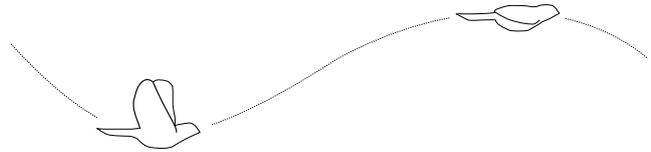

bounding

While an AWE plant producing energy in hovering mode will stay mostly stationary relative to a reference point on the ground, the bounding mode plant will let the blades drift downwind and typically use the changing tether length to extract energy. The way the bird in bounding flight will tuck its wings close to its body resembles how the blades of an AWE plant are reconfigured when reeling in the tether to try to reduce the overall drag.

Relative to M. Loyd's paper [1] bounding mode and lift mode coincide, as do hovering and drag mode.

When apply special consideration to AWE on a cart or a floating ship. If the AWE plant on the cart or ship is used to generate traction in somewhat the direction of travel, the plant is said to be operating in bounding mode. This holds true even if the cart or ship never depowers the kites or blades in order to return to its origin. The physical explanation to this is that the AWE plant will be drifting downwind to a certain degree, relative to the apparent wind.

Bounding versus hovering is a classification that is rather unique to AWE relative to traditional wind power. Some drag based designs such as the the Savonius turbine do exhibit behavior that could qualify for a bounding classification; the blades move downwind when producing power, then move upwind with lesser drag. Still, we will choose limit the discussion of bounding versus hovering to airborne wind energy.

In [3] the authors conclude that hovering [drag] power systems can harvest up to $\frac{16}{27}$ of the power available in the wind while bounding systems [lift] can harvest only $\frac{4}{27}$. Note that the paper only discusses hovering and bounding systems on a stationary ground station.

Energy Transmission Method Classification

Another aspect over which we may want to classify AWE designs is their means of transferring energy. The energy is harvested at altitude and must be transferred down to ground level. We are not concerned with how the harvested energy is further used or converted once at the ground level. The four methods are:

Pulling	The blades typically pull a tether. This is normally associated with a bounding mode design
Reeling	The design features a tether as a loop, reeling endlessly
Energy conversion	The power is typically transferred by means of electricity through a conducting tether
Rotary shaft	The power is transmitted as torque to the ground through a shaft

Pulling transmission could be done either by elongating the tether, by moving a cart or ship or by another mechanism on the ground. Pulling transmission will inevitably happen in cycles where the tension of a single tether varies from high during production and low during return phases. The length of the cycle could coincide with the cycle frequency of the blades so that production and return phase fit into a flight pattern cycle. It could also span more flight cycles, so that the production phase includes many flight patterns cycles.

Reeling transmission would have one tether that would always be of general higher tension and one tether of lower tension. The tether would be running in an endless loop to provide continuous power delivery. If the tether was not running in a loop but rather alternating directions this may also be considered reeling transmission, if this was solved in a way that was not typical of bounding mode and pulling transmission.

Energy conversion transmission would normally mean converting mechanical aerodynamic energy from the wind into electricity that could be transferred to the ground by means of a conducting tether. One could also foresee other options where such energy was converted, as an example, to Hydrogen, then transferred to ground in a tubular tether. Another example could be where electricity was used to produce valuable data that could be sent wirelessly to the ground or elsewhere. All such schemes belong to this category.

Rotary shaft transmission would feature a shaft going from the airborne blades down to the ground station. The shaft could be a solid tube, maybe made from carbon fiber laminates. It could also be two or more tethers under tension, kept apart by aerodynamic and centrifugal forces in air, and by a rotating beam or cartwheel on the ground. Between these two extremes, shafts constituting tensile [soft] and compressive [rigid] members are also possible.

Classification of AWE actors

We will classify existing AWE actors and designs based on the proposed scheme. The actors are listed in [5] with a few more added.

Company / Design	Mode		Energy Transmission			
	Bound- ing	Hover- ing	Pul- ling	Reel- ing	E- conv	Rot- ary
Altaeros Energy		✓			✓	
Ampyx Power	✓		✓			
Brainwhere		✓			✓	
e-kite	✓		✓			
Enerkite	✓		✓			
Kite Power Systems	✓		✓			
kiteKRAFT		✓			✓	
Kitemill	✓		✓			
Kitenrg	✓		✓			
Kitepower	✓		✓			
Kitewinder		✓		✓		
Makani		✓			✓	
Omnidea	✓		✓			
Selsam Innovations		✓				✓
Sky Windpower		✓			✓	
Skypull	✓		✓			
Skysails Power	✓		✓			
someAWE		✓				✓
Twingtec	✓		✓			
Windlift		✓			✓	
Windswept & Interesting		✓				✓
Zhonglu H. A. W. P	✓		✓			

Other Descriptive Terms in AWE

Besides the two dimensions of categories described so far [operating mode and energy transmission], we have compiled a list of terms that are often used to describe AWE systems. We also discuss their meanings and scope. These terms may also be used to describe and categorize AWE designs for more specific purposes.

crosswind versus downwind - a plant is said to be crosswind if the blades are traveling mostly perpendicular to the wind speed

flygen and groundgen - these terms specify whether the generator is on the ground or airborne. These terms are used interchangeably with «lift» and «drag» mode from [1]. The terms are less generic than the terms hovering versus bounded operation mode. Thus they may be avoided for clarity.

multi-kite - any AWE design that uses several kites connected by tethers. The kites may be lifter kites and blade kites, just blade kites or other variations.

passive kite - a kite that can operate without any actuators that are powered or controlled by equipment that is airborne

self-erect versus lifted - a plant is said to be self-erect if the blades themselves keep the kite airborne, without support from towers, supports or lifter kites

soft kite versus rigid kite - a kite either just a single skin, self inflated ribs or supported by an inflated structure. This is as opposed to a rigid [or fixed] kite, typically made from composite materials such as carbon fiber with resin

References

- [1] Crosswind Kite Power
Miles L. Loyd
<https://doi.org/10.2514/3.48021>
- [2] Bounding and undulating flight in birds
J. M. V. Rayner
[https://doi.org/10.1016/S0022-5193\(85\)80164-8](https://doi.org/10.1016/S0022-5193(85)80164-8)
- [3] The Betz limit applied to Airborne Wind Energy
M. De Lellis, R. Reginatto, A. Trofino
<https://doi.org/10.1016/j.renene.2018.04.034>
- [4] A controllability perspective of dynamic soaring
I. Mir, H. Taha, S. A. N. Eisa, A. Maqsood
doi:10.1007/s11071-018-4493-6
- [5] Future emerging technologies in the wind power sector: A European perspective
S. Watson et. al.
<https://doi.org/10.1016/j.rser.2019.109270>